



# LR4-72HBD 415~435M

Hi-M04

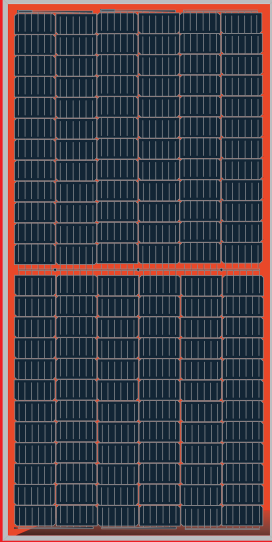

**High Efficiency  
Low LID Bifacial PERC with  
Half-cut Technology**

10-year Warranty for Materials and Processing;  
30-year Warranty for Extra Linear Power Output

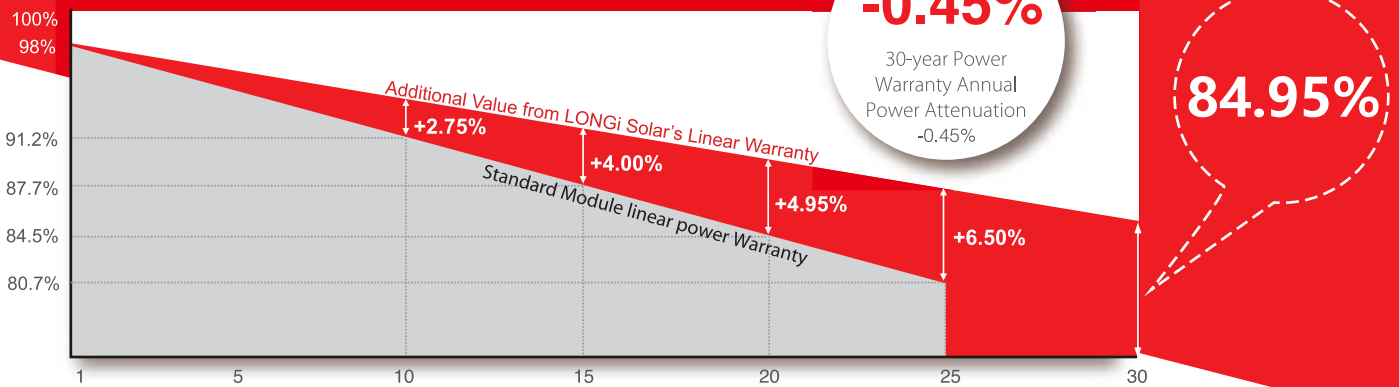

## Complete System and Product Certifications

IEC 61215, IEC61730, UL1703  
ISO 9001:2008: ISO Quality Management System  
ISO 14001: 2004: ISO Environment Management System  
TS62941: Guideline for module design qualification and type approval  
OHSAS 18001: 2007 Occupational Health and Safety



\* Specifications subject to technical changes and tests. LONGi Solar reserves the right of interpretation.

## Front side performance equivalent to conventional low LID mono PERC:

- High module conversion efficiency (up to 19.4%)
- Better energy yield with excellent low irradiance performance and temperature coefficient
- First year power degradation <2%

**Bifacial technology** enables additional energy harvesting from rear side (up to 25%)

**Glass/glass lamination** ensures 30 year product lifetime, with annual power degradation < 0.45%, 1500V compatible to reduce BOS cost

**Solid PID resistance** ensured by solar cell process optimization and careful module BOM selection

**Reduced resistive loss** with lower operating current

**Higher energy yield** with lower operating temperature

**Reduced hot spot risk** with optimized electrical design and lower operating current


# LONGi Solar

Room 801, Tower 3, Lujiazui Financial Plaza, No.826 Century Avenue, Pudong Shanghai, 200120, China  
Tel: +86-21-80162606 E-mail: module@longi-silicon.com Facebook: www.facebook.com/LONGi Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

# LR4-72HBD 415~435M

## Design (mm)

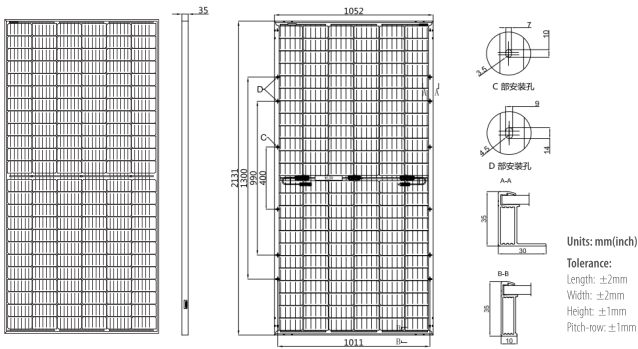

## Mechanical Parameters

Cell Orientation: 144 (6×24)  
 Junction Box: IP68, three diodes  
 Output Cable: 4mm<sup>2</sup>, 1200mm in length  
 Glass: Dual glass  
 2.0mm tempered glass  
 Frame: Anodized aluminum alloy frame  
 Weight: 28.5kg  
 Dimension: 2131×1052×35mm  
 Packaging: 30pcs per pallet  
 600pcs per 40'HC

## Operating Parameters

Operational Temperature: -40°C ~ +85°C  
 Power Output Tolerance: 0 ~ +5 W  
 Voc and Isc Tolerance: ±3%  
 Maximum System Voltage: DC1500V (IEC / UL)  
 Maximum Series Fuse Rating: 20A  
 Nominal Operating Cell Temperature: 45±2°C  
 Safety Class: Class II  
 Fire Rating: UL type 6  
 Bifaciality: ≥75%

## Electrical Characteristics

Test uncertainty for Pmax: ±3%

Model Number	LR4-72HBD-415M		LR4-72HBD-420M		LR4-72HBD-425M		LR4-72HBD-430M		LR4-72HBD-435M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	415	308.6	420	312.3	425	316.0	430	319.7	435	323.5
Open Circuit Voltage (Voc/V)	49.0	45.6	49.2	45.8	49.4	46.0	49.6	46.2	49.8	46.4
Short Circuit Current (Isc/A)	10.73	8.69	10.80	8.74	10.86	8.80	10.93	8.85	11.00	8.91
Voltage at Maximum Power (Vmp/V)	40.6	37.7	40.8	37.9	41.0	38.1	41.2	38.2	41.4	38.4
Current at Maximum Power (Imp/A)	10.23	8.19	10.30	8.25	10.37	8.30	10.44	8.36	10.51	8.42
Module Efficiency(%)	18.5		18.7		19.0		19.2		19.4	

STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

Electrical characteristics with different rear side power gain (reference to 425W front)

Pmax /W	Voc/V	Isc /A	Vmp/V	Imp /A	Pmax gain
446	49.4	11.41	41.0	10.88	5%
468	49.4	11.95	41.0	11.40	10%
489	49.5	12.49	41.1	11.92	15%
510	49.5	13.04	41.1	12.44	20%
531	49.5	13.58	41.1	12.96	25%

## Temperature Ratings ( STC )


Temperature Coefficient of Isc: +0.060%/C  
 Temperature Coefficient of Voc: -0.300%/C  
 Temperature Coefficient of Pmax: -0.370%/C

## Mechanical Loading


Front Side Maximum Static Loading: 5400Pa  
 Rear Side Maximum Static Loading: 2400Pa  
 Hailstone Test: 25mm Hailstone at the speed of 23m/s

## I-V Curve


Current-Voltage Curve (LR4-72HBD-425M)

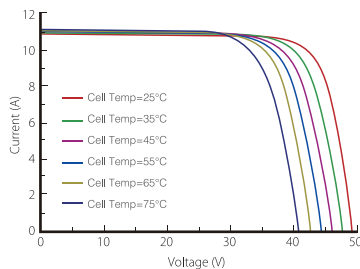

Power-Voltage Curve (LR4-72HBD-425M)

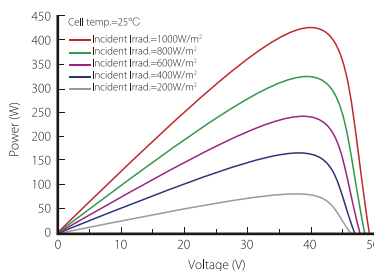

Current-Voltage Curve (LR4-72HBD-425M)

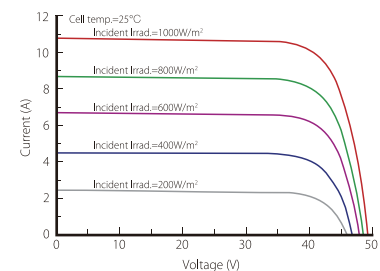

# LONGI Solar

Room 801, Tower 3, Lujiuzi Financial Plaza, No.826 Century Avenue, Pudong Shanghai, 200120, China  
 Tel: +86-21-80162606 E-mail: module@longi-silicon.com Facebook: www.facebook.com/LONGI Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGI Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.